DAILY

IVECO Bus










DAILY LINE - Intercity Minibus - Diesel EURO VI

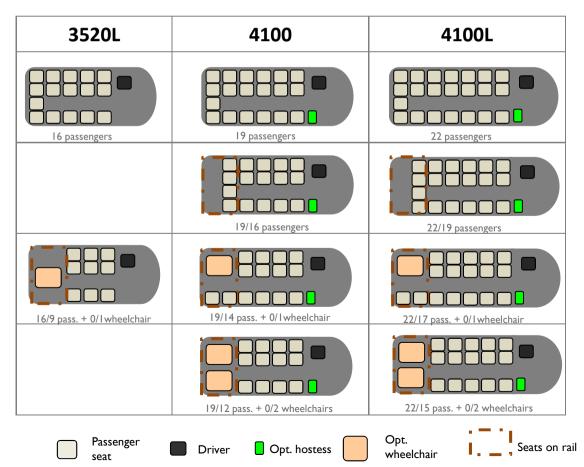

Wheelbase	3520 mm (L)	4100 mm	4100 mm (L)
Overall Length	5950 mm	7120 mm	7515 mm
Width	2052 mm	2052 mm	2174 mm
Height (with A/C)	2784 mm	2784 mm	2905 mm
Standing height	1820 mm		
Front Overhang	1008 mm		
Rear Overhang	1422	2012 mm	2407 mm
Front Track	1724 mm	1724 mm	1725 mm
Rear Track	1540 mm	1540 mm	1661 mm
Turning diameter wall-to-wall	12744 mm	15190 mm	14758 mm
Turning diameter kerb-to-kerb	12084 mm	14564 mm	14108 mm
Approach / Departure angles	19.05°/22.61°	19.17°/22.52°	19.61°/21.62°
GVW	4500 kg	5600 kg	6100 kg
Max. axle load Front/Rear	2100/3100 kg	2100/3700 kg	2200/4200 kg


FIC EURO VI				
Power	125 Kw (170 hp) @ 3500 rpm	107 Kw (146hp) @ 3500 rpm		
Torque	400 Nm @1350 - 3000 rpm	350 Nm @ 1500 - 2900 rpm		
Displacement	3,0 litres			
4 cylinders in line, Unijet Common Rail				

DAILY

DAILY LINE - Intercity Minibus - Diesel EURO VI

ENGINE

- FPT FICFL41 IF
- I70hp Euro VI HD VGT
- or • FPT FICFI4LIF
- FPI FICFL4I IE
- I46hp Euro VI HD WG



GEARBOX

• FPT 2840.6 Overdrive mechanical gearbox, 6 gears and reverse

140

130

120

110

80

AXLES

- Front : Independent wheels - Power steering
- Power st
- Rear : Rigid
 - Twin wheel
 - 3520L : Ratio 3.308
 - 4100 : Ratio 3.615 - 4100L : Ratio 4.3

SUSPENSIONS

- Front : independent with torsion bar
- Rear : dual-leaf parabolic springs

BRAKES

- ESP9
- Full disc brakes

FUEL TANK

- Fuel tank capacity : 70l
- Urea tank : 25I

TYRES

- 3520L: 195/75 R 16
- 4100 : 195/75 R16
- 4100L: 225/65 R16
- Spare wheel

AUDIO / VIDEO

- Radio CD MP3
- · Loudspeakers on roof

BODYWORK / EXTERIOR EQUIPMENT

- Anti-corrosion protection by full cataphoretic dipping
- Two models of passengers electric sliding door, fitted with emergency handle and anti-pinch device
- Two rear doors with heated windows
- Heated and electrically adjustable mirrors

WINDOWS / THERMAL COMFORT

- Athermic windscreen
- Single athermic glued windows
- Thermo-acoustic insulation
- A/C for driver
- 4 speeds electrical fans with air distribution functions and air recirculation for driver
- Passengers' air conditioning through air channels on luggage racks
- Convector heater on left side

INTERIOR EQUIPMENT

- Floor covering in PVC
- Side wall covering in leather imitation
- Windows frame covering in ABS
- Luggage racks on both sides, with blue/white LED lights
- Emergency and ventilation roof hatch
- Passenger seats fixed directly on the floor, covered in fabric, with handle and armrest
- 2 and 3 points seatbelts

DRIVER COMPARTMENT

- Adjustable and air suspended driver seat
- Electric driver window
- Dedicated storage compartments
- Refrigerated glove-box
- Digital tachograph

DISABLED VERSION (option)

- Possibility of fitting 1 or 2 wheelchairs
- Rear underfloor lifting platform
- Two last rows of seats removable
- I/2 buttons for stop and door opening request, and driver call

Optional:

• Vehicle painting in metallic color

IVECO

- Door fitted with glass defrosting and silicon gasket
- Fog lights
- External front display predisposition
- A/C casing same body color

Optional:

- Rear windows with vasistas opening
- Double glazing
- Independent air heating system
- Timer for air heating system in passengers' area
- Optional :
- Seats with adjustable backrest
- 3 points seatbelt on all seats
- Partition wall on first raw of seats
- Curtains on passengers' windows
- Hostess seat
- I.2m3 luggage compartment (last rows of seats removable)

Optional:

- Driver's airbag
- Cruise control
- Partition wall behind driver
- On-board payment installation
- LDWS (Lane Departure Warning System)

3520L : Ratio 3.615 4100 : Ratio 3.91 4100L : Ratio 5.13

Optional:

Optional:

(only with 170hp)

• Agile® automated gearbox

Optional:

 Rear air suspension –ECAS (standard with 4100L)

Optional:

Telma® Retarder

Optional:

Fuel tank 1001

Optional:

Optional:

Navigation

Microphone

Steering wheel audio controls

IVECONNECT : Radio CD MP3 + GPS

• Tyre repair kit